


# Nutrix/FF

Marcatura/Marking:  NUTRIX/FF Ø INT x Ø EST REG. 10/2011  lotto

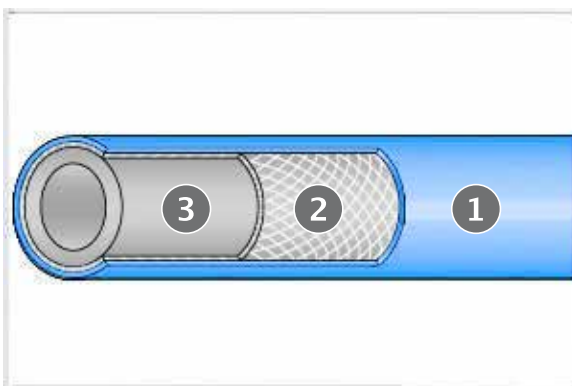

## Applicazioni/Application:

Idoneo per trasferimento cibo, passaggio di latte, succhi di frutta, birra, vino, grassi animali / vegetali e olio secondo REG. EU 10/2011 simulanti A,B,C,D1,D2.

Ottima flessibilità, copertura non sporchevole e scivolosa, di facile pulizia e resistente agli oli, grassi animali e detergenti.

Idoneo per il passaggio di acqua calda in continuo fino a 100°C.

La sua particolare flessibilità e morbidezza lo rendono particolarmente adatto per utilizzo su avvolgitubo in contesti alimentari.

Esente da ftalati.

*For water, milk, juices, bier, fatty foodstuff, oil, in compliance with eu regulation nr. 10/2011, categories A,B,C,D1,D2.*

*Very flexible, easy to clean and grease proof. Resistant against, oil, animal fats, detergents and chemical agents.*

*Suitable for the passage of hot water up to 100°C. For hose reels, in any environment where food safety is required.*

*Phatalate free.*










## Temperatura d'impiego/Temperature range:

- 15°C +100°C

## Costruzione/Construction:

- 1 Copertura: TPE blu, morbido, non sporchevole.
- 2 Inserto tessile: poliestere alta tenacità.
- 3 Strato interno in TPE neutro, morbido, alimentare, resistente alle alte temperature.

- 1 *Outer layer: blue, soft, grease proof TPE.*
- 2 *Reinforcement: polyester high strenght.*
- 3 *Inner layer: transparent, soft, TPE grade. High temperature resistant, suitable for foodstuff.*

 mm	 mm	 mm	 mm	 Bar A 20° C	 Bar A 100° C	 Bar A 20° C	 Bar A 100° C	 g/m
10	17	3.5	60	20	10	60	30	190
13	20	3.5	80	20	10	60	30	250
16	23	3.5	90	20	10	60	30	290
19	27	4.0	110	20	10	60	30	365
25	34	4.5	150	20	10	60	30	560

